


Features

- 3mm DIA LED Lamp
- Low Power Consumption
- High Efficiency
- Various Colors and Viewing Angle
- Long Solid State Reliability
- Package: 1000pcs/Packing

Applications

- Indicator

Package Dimensions

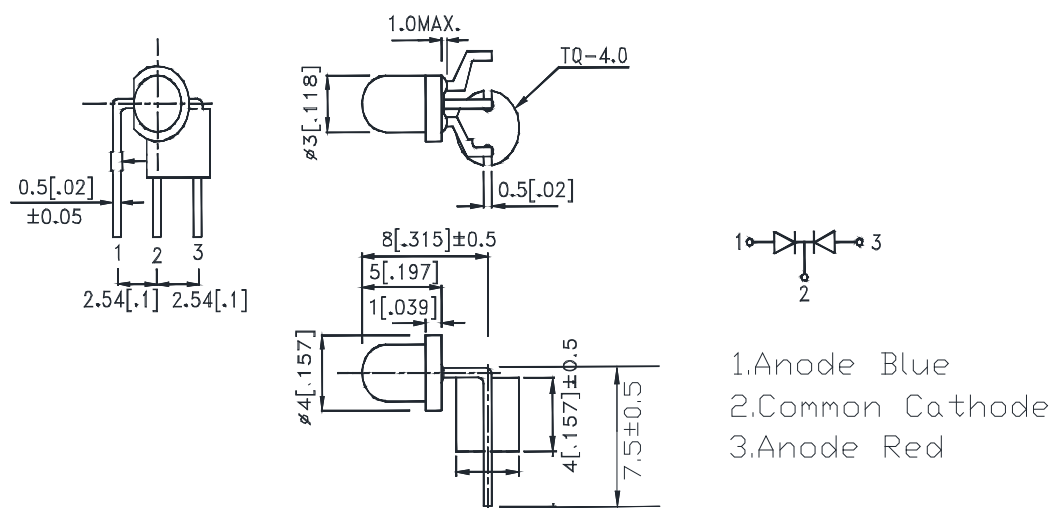

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}$ (.01") unless otherwise noted.
3. Protruded Resin under flange is 1.0mm(0.04") max.
4. Specifications are subject to change without notice.



Selection Guide

Part No	Lens Type	Dice	Emitted Color
FDA-3523BR-ZWD1-CC-L8.0-7.5	White Diffused	GaAsP	Red Blue

Electrical / Optical Characteristics At Ta=25 °C

Symbol	Parameter		Red	Blue	Unit	Test Condition
Iv	Luminous Intensity	MIN.	28	45	mcd	IF=20mA
		TYP.	35	112		
		MAX.	180	450		
2θ1/2	Viewing Angle	TYP.	70	70	deg	IF=20mA
λ Peak	Peak Emission Wavelength	TYP.	635	468	nm	IF=20mA
λ d	Dominant Wavelength	MIN.	620	460	nm	IF=20mA
		TYP.	627	470		
		MAX.	630	475		
△λ	Spectral Line Half-Width	TYP.	20	60	nm	IF=20mA
VF	Forward Voltage	MIN.	1.6	2.6	V	IF=20mA
		TYP.	2.0	3.3		
		MAX.	2.6	3.8		
IR	Reverse Current	MAX.	10	10	μ A	VR=5V

Note:

1.θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 optical centerline value







Absolute Maximum Ratings At Ta=25°C

Parameter	Red	Blue	Unit
Power Dissipation	80	80	mW
Peak Forward Current[1]	150	150	mA
Continuous Forward Current	30	30	mA
Reverse Voltage	5	5	V
Electrostatic Discharge(HBM)	2000	150	V
Operating Temperature Range	-40°C to + 85°C		
Storage Temperature Range	-40°C to + 85°C		
Soldering Condition	260°C For 5 Seconds		


Note:

1. 1/10DutvCvcle. 0.1ms Pulse Width


Electrical Optical Characteristics Curves At Ta=25 °C

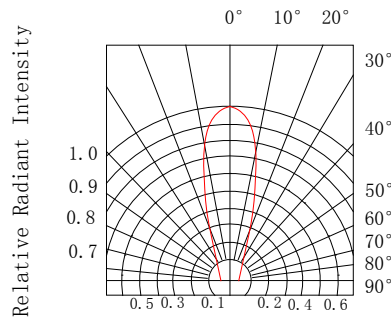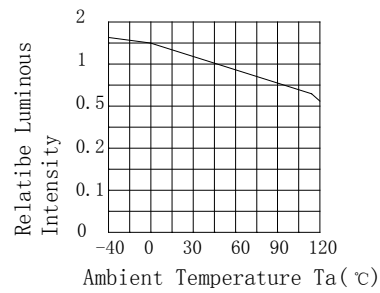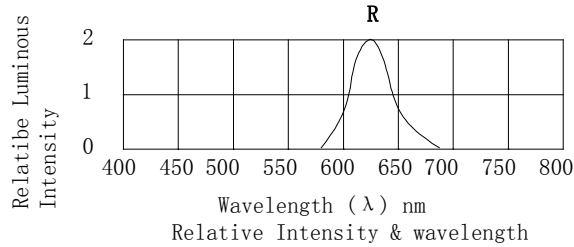

Electrical Optical Characteristics Curves At Ta=25 °C

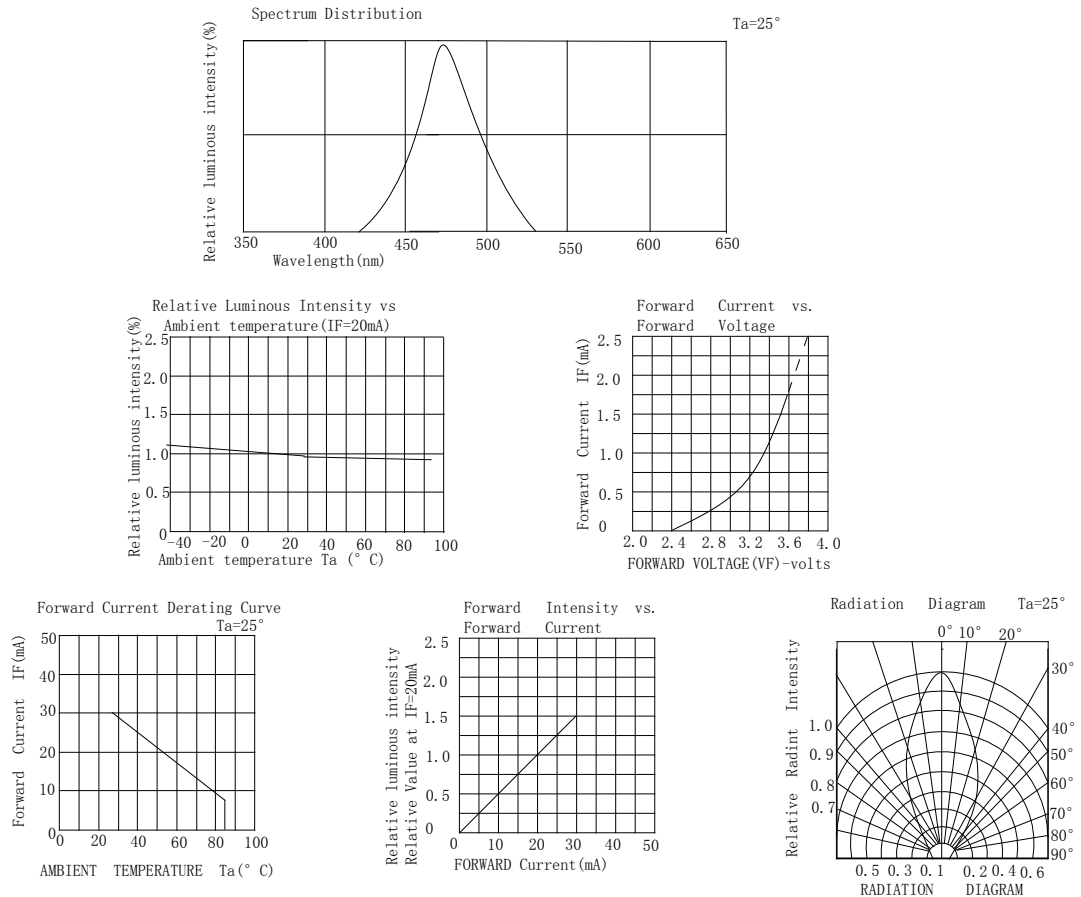

Reflow Soldering Instructions

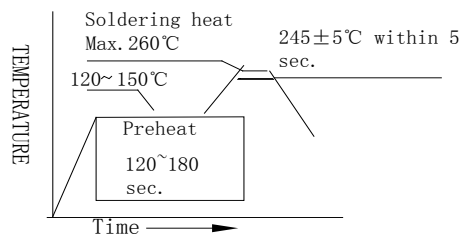

Notes:

1. The LEDs should be used within a year.
2. The LEDs should be kept in 5~30°C and 60% RH for less.
3. The LEDs should be used within 24 hours, or else should be kept a 5~30°C and 30% RH or less. And LEDs should be used within 7 days after opening the package.

Bin Range Of Luminous Intensity

Symbol	Bin Code	Min.	Max.	Unit	Condition
Iv(B)	P	45	71	mcd	If=20mA
	Q	71	112		
	R	112	180		
	S	180	280		
	T	280	450		
Iv(R)	N	28	45	mcd	If=20mA
	P	45	71		
	Q	71	112		
	R	112	180		

Bin Range Of Dominate Wavelength

Symbol	Bin Code	Min.	Max.	Unit	Condition
λ_d	C	565	568	nm	If=20mA
	D	568	572		
	E	572	575		

Notes:

1. Tolerance of Luminous Intensity +/-20%
2. Tolerance of Forward Voltage +/-0.15V
3. Tolerance of the Dominate Wavelength +/- 2nm

Reliability Test Items Conditions

Classification	Test Item	Test Conditions	Test hours	Result
Endurance Test	Operation Life	Connect with a power $I_F=10\text{mA}$ $T_a=\text{Under room temperature}$	1000Hrs	0/20
	High Temperature High Humidity	$T_a=+65^\circ\text{C}\pm 5^\circ\text{C}$ $RH=90\%-95\%$	240Hrs	0/20
	High Temperature Storage	High $T_a=+85^\circ\text{C}\pm 5^\circ\text{C}$	1000Hrs	0/20
	Low Temperature Storage	Low $T_a=-35^\circ\text{C}\pm 5^\circ\text{C}$ Test time=1000hrs	1000Hrs	0/20
Environmental Test	Temperature Cycling	$-45^\circ\text{C}\sim +105^\circ\text{C}$ 15min 5min 15min	300 Cycles	0/20
	Thermal Shock	$-35^\circ\text{C}\sim \pm 5^\circ\text{C}\sim +85^\circ\text{C}\sim \pm 5^\circ\text{C}$ 5min 10sec 5min	300 Cycles	0/20
	Solder Resistance	Preheating: $120^\circ\text{C}-150^\circ\text{C}$, within 2 minutes. Operation heating : 260°C (Max.), within 5 seconds (Max.)	5Cycles	0/20

Judgment criteria of failure for the reliability

Measuring items	Symbol	Measuring conditions	Judgment criteria for failure
Forward voltage	$V_F(\text{V})$	$I_F=10\text{mA}$	Over $U\times 1.2$
Reverse current	$I_R(\mu\text{A})$	$V_R=5\text{V}$	Over $U\times 2$
Luminous intensity	$I_v(\text{mcd})$	$I_F=10\text{mA}$	Below $S\times 0.5$

Note: 1.U means the upper limit of specified characteristics. S means initial value.

2.Measurement shall be taken between 2 hours after the test pieces have been returned to normal ambient conditions after completion of each test.