


Features

- 3mm DIA LED Lamp
- Low Power Consumption
- High Efficiency
- Various Colors and Viewing Angle
- Long Solid State Reliability
- Package: 1000pcs/Packing

Applications

- Indicator

Package Dimensions

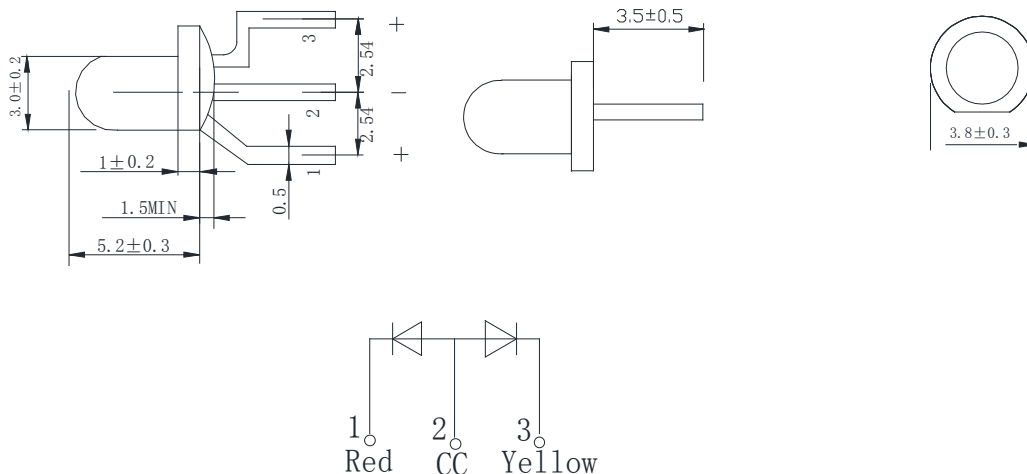

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}$ (.01") unless otherwise noted.
3. Protruded Resin under flange is 1.0mm(0.04") max.
4. Specifications are subject to change without notice.

**FDL-3523RY-ZWD1S-CC-YH3.5****Selection Guide**

Part No	Lens Type	Dice	Emitted Color
FDL-3523RY-ZWD1S-CC-YH3.5	White Diffused	AlInGaP GaAsP	Yellow Red

Electrical / Optical Characteristics At Ta=25 °C

Symbol	Parameter		Yellow	Red	Unit	Test Condition
Iv	Luminous Intensity	MIN.	28.0	25.0	mcd	IF=20mA
		TYP.	45.0	35.0		
2θ1/2	Viewing Angle	TYP.	30	30	deg	IF=20mA
λ Peak	Peak Emission Wavelength	TYP.	591	631	nm	IF=20mA
λ d	Dominant Wavelength	TYP.	589	625	nm	IF=20mA
Δλ	Spectral Line Half-Width	TYP.	15	20	nm	IF=20mA
VF	Forward Voltage	TYP.	2.0	2.0	V	IF=20mA
		MAX.	2.4	2.5		
IR	Reverse Current	MAX.	10	10	μ A	VR 5V

Note:

1.θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 optical centerline value


Absolute Maximum Ratings At Ta=25°C

Parameter	Yellow	Red	Unit
Power Dissipation	80	80	mW
Peak Forward Current[1]	150	150	mA
Continuous Forward Current	30	30	mA
Reverse Voltage	5	5	V
Operating Temperature Range	-40°C to + 85°C		
Storage Temperature Range	-40°C to + 85°C		
Soldering Condition	260°C For 5 Seconds		






Note:

1. 1/10DutyCycle, 0.1ms Pulse Width

Electrical Optical Characteristics Curves At Ta=25 °C

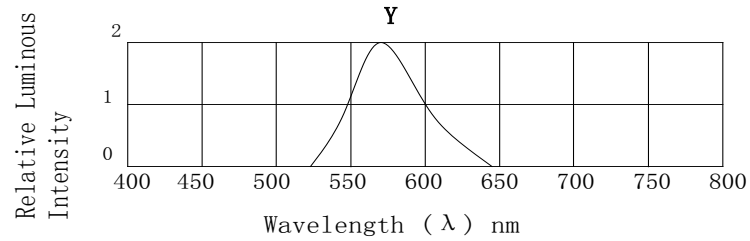


Relative Intensity & Wavelength

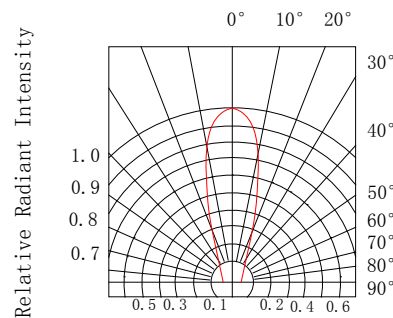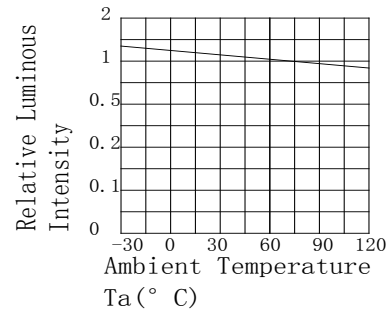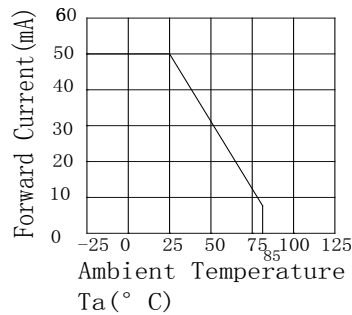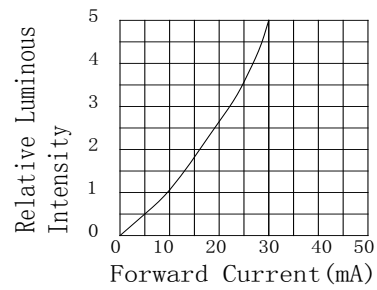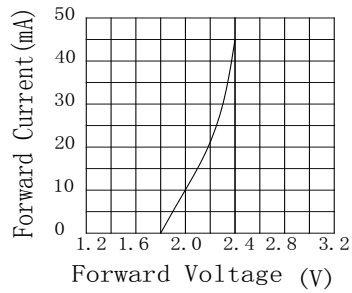

Radiation Diagram

Electrical Optical Characteristics Curves At Ta=25 °C

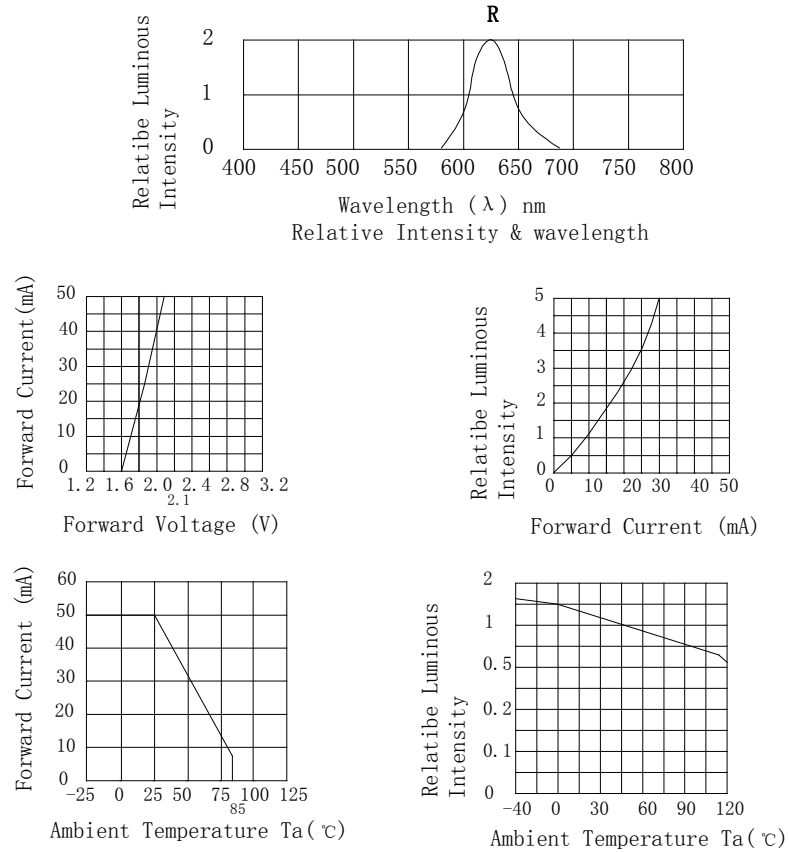

Notes:

1. The LEDs should be used within a year.
2. The LEDs should be kept in 5~30°C and 60% RH for less.
3. The LEDs should be used within 24 hours, or else should be kept a 5~30°C and 30% RH or less. And LEDs should be used within 7 days after opening the package.

Reliability Test Items Conditions

Classification	Test Item	Test Conditions	Test hours	Result
Endurance Test	Operation Life	Connect with a power $I_F=20\text{mA}$ $T_a=\text{Under room temperature}$	1000Hrs	0/20
	High Temperature High Humidity	$T_a=+65^{\circ}\text{C}\pm 5^{\circ}\text{C}$ $\text{RH}=90\%-95\%$	240Hrs	0/20
	High Temperature Storage	High $T_a=+85^{\circ}\text{C}\pm 5^{\circ}\text{C}$	1000Hrs	0/20
	Low Temperature Storage	Low $T_a=-35^{\circ}\text{C}\pm 5^{\circ}\text{C}$ Test time=1000hrs	1000Hrs	0/20
Environmental Test	Temperature Cycling	$-45^{\circ}\text{C}\sim +105^{\circ}\text{C}$ 15min 5min 15min	300 Cycles	0/20
	Thermal Shock	$-35^{\circ}\text{C}\sim \pm 5^{\circ}\text{C}\sim +85^{\circ}\text{C}\sim \pm 5^{\circ}\text{C}$ 5min 10sec 5min	300 Cycles	0/20
	Solder Resistance	Preheating: $120^{\circ}\text{C}-150^{\circ}\text{C}$, within 2 minutes. Operation heating : 260°C (Max.), within 5 seconds (Max.)	5Cycles	0/20

Judgment criteria of failure for the reliability

Measuring items	Symbol	Measuring conditions	Judgment criteria for failure
Forward voltage	$V_F(\text{V})$	$I_F=20\text{mA}$	Over $U\times 1.2$
Reverse current	$I_R(\mu\text{A})$	$V_R=5\text{V}$	Over $U\times 2$
Luminous intensity	$I_v(\text{mcd})$	$I_F=20\text{mA}$	Below $S\times 0.5$

Note: 1.U means the upper limit of specified characteristics. S means initial value.

2.Measurment shall be taken between 2 hours after the test pieces have been returned to normal ambient conditions after completion of each test.