


Features

- 4.8mm DIA LED Lamp
- Low Power Consumption
- High Efficiency
- Various Colors and Viewing Angle
- Long Solid State Reliability
- Package: 1000pcs/Packing

Applications

- Indicator

Package Dimensions

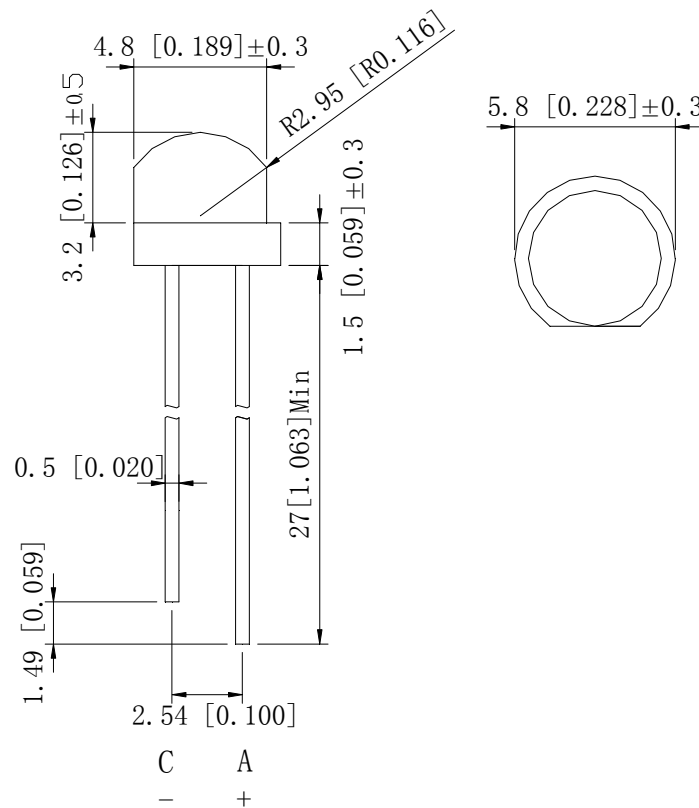

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is ±0.25mm (.01") unless otherwise noted.
3. Protruded Resin under flange is 1.0mm (0.04") max.
4. Specifications are subject to change without notice.

www.FantasyLeds.com

Sales@FantasyLeds.com

Form No :

Rev : VB2

Page: 1 of 4

Approved By:

Prepared By:

Date:2010.5.26



FDL-4847HY-TWCL

Selection Guide

Part No	Lens Type	Dice	Emitted Color
FDL-4847Y-TWCL	Water Clear	InGaINP	Super Bright Yellow

Electrical / Optical Characteristics At Ta=25°C

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Condition
Iv	Luminous Intensity	450		1120	mcd	IF=20mA
2θ1/2	Viewing Angle		130		deg	IF=20mA
λ Peak	Peak Emission Wavelength		590		nm	IF=20mA
λ d	Dominant Wavelength		589		nm	IF=20mA
△λ	Spectral Line Half-Width		20		nm	IF=20mA
VF	Forward Voltage		2	2.5	V	IF=20mA
IR	Reverse Current			10	μ A	VR=5V

Note:

1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 optical centerline value

Absolute Maximum Ratings At Ta=25°C

Parameter	White	Unit
Power Dissipation	75	mW
Peak Forward Current[1]	140	mA
Continuous Forward Current	30	mA
Reverse Voltage	5	V
Electrostatic Discharge Threshold(HBM)	1000	V
Operating Temperature Range	-20°C to + 85°C	
Storage Temperature Range	-40°C to + 100°C	
Soldering Condition	260°C For 5 Seconds	

Note:

1. 1/10DutyCycle, 0.1msPulseWidth

Electrical Optical Characteristics Curves At Ta=25°C




Fig. 1 Relative Luminous Intensity vs. Wavelength @ 20mA




Fig. 2 Directivity Radiation Diagram




Fig. 3 Relative Intensity(10mA) vs. Forward Voltage




Fig. 4 Relative Luminous Intensity (%) vs Forward Current




Fig. 5 Forward Current vs. Temperature


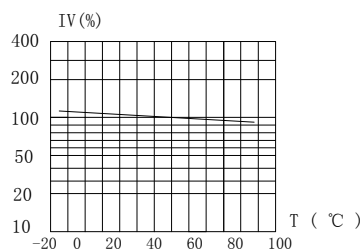


Fig. 6 Relative Intensity (%) vs. Temperature @ 20mA

Reflow Soldering Instructions



Notes:

1. The LEDs should be used within a year.
2. The LEDs should be kept in 5~30°C and 60% RH for less.
3. The LEDs should be used within 24 hours, or else should be kept a 5~30°C and 30% RH or less. And LEDs should be used within 7 days after opening the package.

Reliability Test Items Conditions

Classification	Test Item	Test Conditions	Test hours	Result
Endurance Test	Operation Life	Connect with a power $I_F=20\text{mA}$ T_a =Under room temperature	1000Hrs	0/20
	High Temperature High Humidity	$T_a=+65^{\circ}\text{C}\pm 5^{\circ}\text{C}$ RH=90%-95%	240Hrs	0/20
	High Temperature Storage	High $T_a=+85^{\circ}\text{C}\pm 5^{\circ}\text{C}$	1000Hrs	0/20
	Low Temperature Storage	Low $T_a=-35^{\circ}\text{C}\pm 5^{\circ}\text{C}$ Test time=1000hrs	1000Hrs	0/20
Environmental Test	Temperature Cycling	$-45^{\circ}\text{C}\sim +105^{\circ}\text{C}$ 15min 5min 15min	300 Cycles	0/20
	Thermal Shock	$-35^{\circ}\text{C}\sim \pm 5^{\circ}\text{C}\sim +85^{\circ}\text{C}\sim \pm 5^{\circ}\text{C}$ 5min 10sec 5min	300 Cycles	0/20
	Solder Resistance	Preheating: $120^{\circ}\text{C}-150^{\circ}\text{C}$, within 2 minutes. Operation heating : 260°C (Max.), within 5 seconds (Max.)	5Cycles	0/20

Judgment criteria of failure for the reliability

Measuring items	Symbol	Measuring conditions	Judement criteria for failure
Forward voltage	$V_F(\text{V})$	$I_F=20\text{mA}$	Over $U\times 1.2$
Reverse current	$I_R(\mu\text{A})$	$V_R=5\text{V}$	Over $U\times 2$
Luminous intensity	$I_v(\text{mcd})$	$I_F=20\text{mA}$	Below $S\times 0.5$

Note: 1.U means the upper limit of specified characteristics. S means initial value.

2.Measurement shall be taken between 2 hours after the test pieces have been returned to normal ambient conditions after completion of each test.