



Features

- 3mm DIA LED Lamp
- Low Power Consumption
- High Efficiency
- Various Colors and Viewing Angle
- Long Solid State Reliability
- Package: 1000pcs/Packing

Applications

- Indicator

Package Dimensions

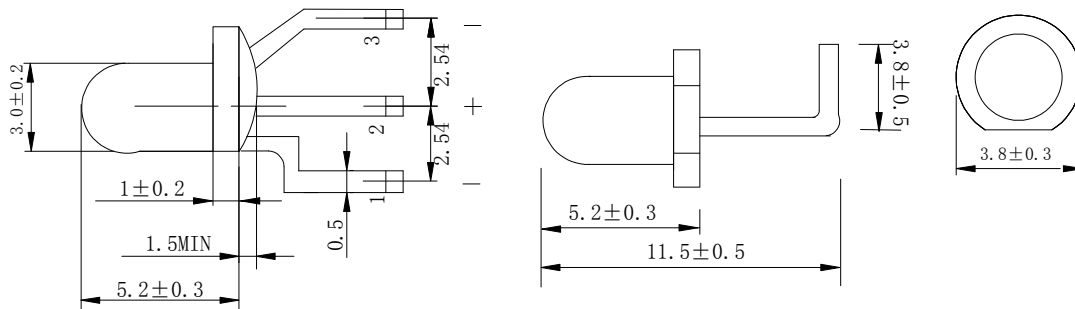

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}$ (.01") unless otherwise noted.
3. Protruded Resin under flange is 1.0mm(0.04") max.
4. Specifications are subject to change without notice.

**Selection Guide**

Part No	Lens Type	Dice	Emitted Color
FDL-3522HRG-ZW1-CA-L11.5-3.8	White Diffused	GaAsP	Red Green

Electrical / Optical Characteristics At Ta=25°C

Symbol	Parameter		Red	Green	Unit	Test Condition
Iv	Luminous Intensity	MIN.	25.0	20.0	mcd	IF=20mA
		TYP.	35.0	35.0		
2θ1/2	Viewing Angle	TYP.	30	30	deg	IF=20mA
λ Peak	Peak Emission Wavelength	TYP.	631	574	nm	IF=20mA
λ d	Dominant Wavelength	TYP.	625	571	nm	IF=20mA
△λ	Spectral Line Half-Width	TYP.	20	20	nm	IF=20mA
VF	Forward Voltage	TYP.	2.0	2.1	V	IF=20mA
		MAX.	2.5	2.4		
IR	Reverse Current	MAX.	10	10	μ A	VR 5V

Note:

1.θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 optical centerline value







Absolute Maximum Ratings At Ta=25°C

Parameter	Red	Green	Unit
Power Dissipation	80	80	mW
Peak Forward Current[1]	150	150	mA
Continuous Forward Current	30	30	mA
Reverse Voltage	5	5	V
Operating Temperature Range	-40°C to + 85°C		
Storage Temperature Range	-40°C to + 85°C		
Soldering Condition	260°C For 5 Seconds		

Note:

1. 1/10DutyCycle, 0.1ms Pulse Width

Electrical Optical Characteristics Curves At Ta=25℃

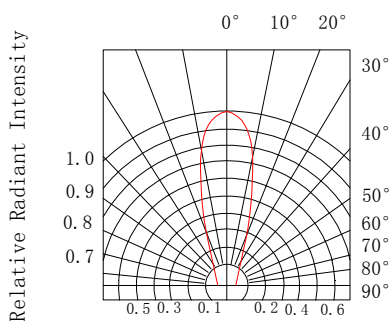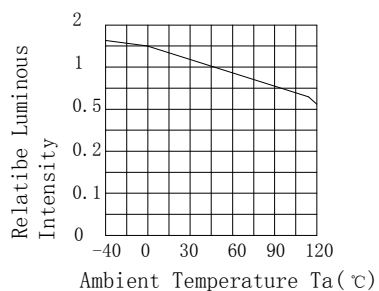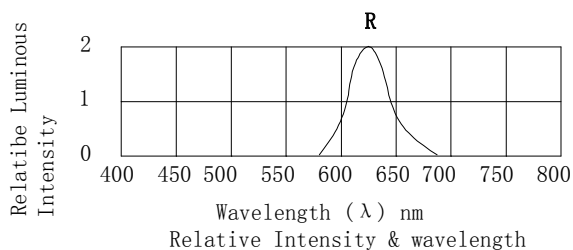

Electrical Optical Characteristics Curves At Ta=25°C


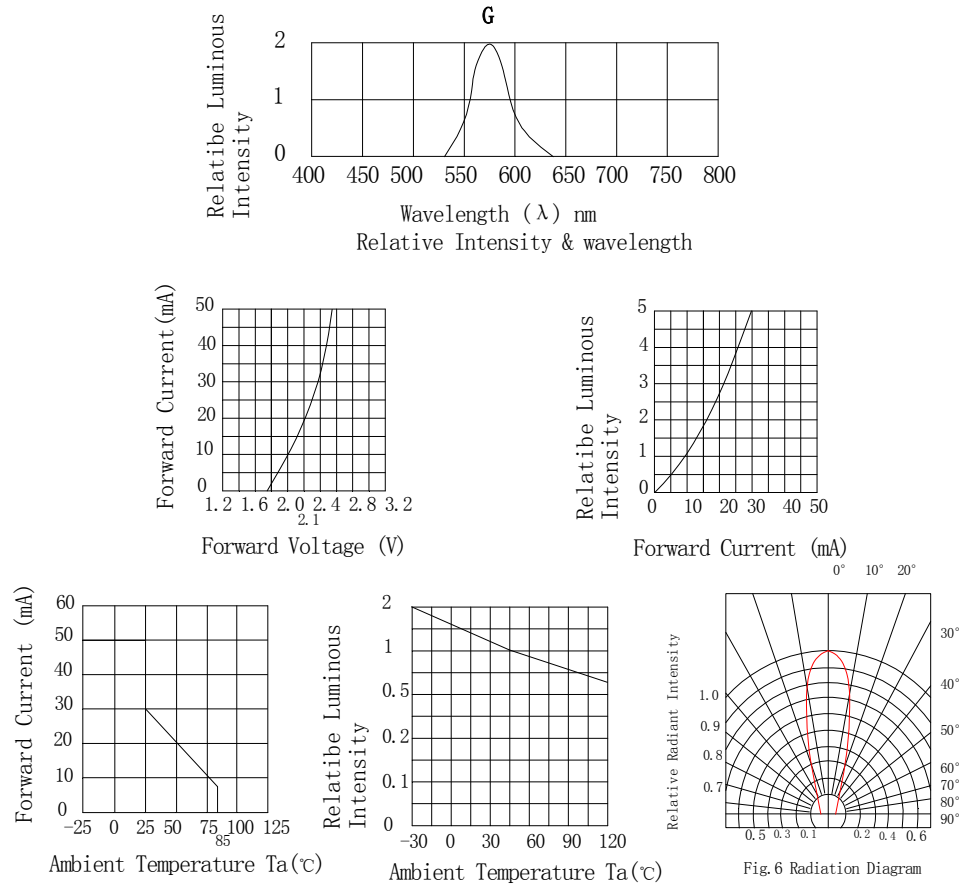


Fig.6 Radiation Diagram

Reflow Soldering Instructions

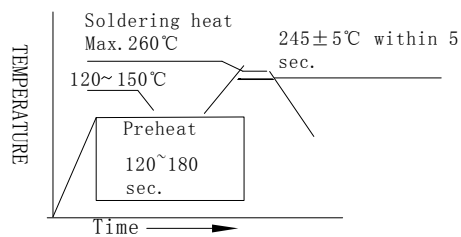

Notes:

1. The LEDs should be used within a year.
2. The LEDs should be kept in 5~30°C and 60% RH for less.
3. The LEDs should be used within 24 hours, or else should be kept a 5~30°C and 30% RH or less. And LEDs should be used within 7 days after opening the package.

Reliability Test Items Conditions

Classification	Test Item	Test Conditions	Test hours	Result
Endurance Test	Opertion Life	Connect with a power If=20mA Ta=Under room temperature	1000Hrs	0/20
	Hige Temperature High Humidity	Ta= + 65℃±5℃ RH=90%-95%	240Hrs	0/20
	Hige Temperature Storage	High Ta= + 85℃±5℃	1000Hrs	0/20
	Low Temperature Storage	Low Ta=-35℃±5℃ Test time=1000hrs	1000Hrs	0/20
Environmental Test	Temperature Cycling	-45℃ ~ +105℃ 15min 5min 15min	300 Cycles	0/20
	Thermal Shock	-35℃ ~ ±5℃ ~ +85℃ ~ ±5℃ 5min 10sec 5min	300 Cycles	0/20
	Solder Resistance	Preheating: 120℃ -150℃ ,within 2 minutes. Operation heating : 260℃ (Max.),within5 seconds(Max.)	5Cycles	0/20

Judgment criteria of fialure for the reliability

Measuring items	Symbol	Measuring conditions	Judgment criteria for failure
Forward voltage	V _F (V)	I _F =20mA	Over U×1.2
Rvevrse current	I _R (μA)	V _R =5V	Over U×2
Luminous intensity	I _v (mcd)	I _F =20mA	Below S×0.5

Note: 1.U means the upper limit of specified characteristics. S means initial value.

2.Meansurerment shall be taken between 2 hours after the test pieces have been returned to normal ambient cnditions after completion of each test.